## **TOTO**<sub>®</sub>

# MS624214CEF(G)

## Legato<sup>®</sup> One-Piece High-Efficiency Toilet, 1.28GPF

#### **FEATURES**

- Tornado Flush<sup>™</sup> system, low consumption • (1.28GPF/4.8LPF)
- CeFiONtect<sup>™</sup> ceramic glaze prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning (not avail on Ebony #51.)
- Universal Height
- Elongated front bowl with SoftClose<sup>®</sup> seat (SS214)
- 12" Unifit rough-in (included)
- Chrome plated, brushed nickel or polished nickel trip lever

#### MODELS

- MS624214CEFG With CeFiONtect ceramic glaze, SS214 SoftClose seat included
- MS624214CEF • Less CeFiONtect, SS214 SoftClose seat included
- TSU03W.10R 10" Unifit rough-in (sold separately)
- TSU03W.14R 14" Unifit rough-in (sold separately)

#### COLORS/FINISHES

- Standard
  - #01 Cotton
  - #03 Bone
  - #11 Colonial White
  - #12 Sedona Beige #51 Ebony (not available in CeFiONtect)

#CP Chrome plated trip lever #BN Brushed nickel trip lever **#PN** Polished nickel trip lever

#### PRODUCT SPECIFICATION

The one-piece high-efficiency Tornado Flush system toilet shall be 1.28GPF/4.8LPF. Toilet shall be 12" Unifit rough-in; 10" and 14" Unifit rough-in are optional. Toilet shall have optional CeFiONtect ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Chrome, Brushed Nickel or Polished Nickel trip lever. Toilet shall be TOTO Model MS624214CEF





CeFiONtect

**Tornado Flush** 

#### CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, • and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



### MS624214CEF(G)

#### Legato<sup>®</sup> One-Piece High-Efficiency Toilet, 1.28GPF


#### **SPECIFICATIONS**

- Water Use 1.28 GPF/4.8LPF
- Flush System Tornado Flush®
- Min. Water Pressure 8 psi (flowing)
- Water Surface 7-3/4" x 9-3/8" 2-1/8"
- Trap Diameter
- Rough-in 12" std, 10" & 14" optional
- Trap Seal 2-1/8"
- Warrantv One Year Limited Warranty
- Material Vitreous china
- Shipping Weight 119 lbs.
- Shipping Dimensions 32"L x 20"W x 17-3/4" H<sup>1</sup> x 28-3/4" H<sup>2</sup>


#### INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

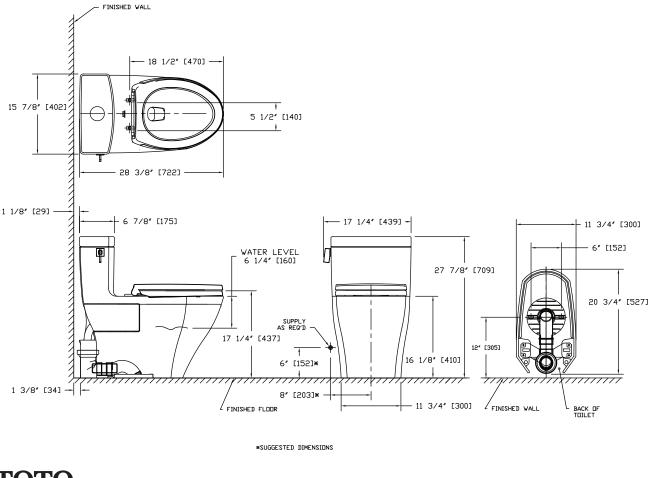

TOTO