




**MODEL NUMBER:**

- ☐ 4285.551 Kitchen Faucet with Side Spray
- ☐ 4285.551.F15 Kitchen Faucet with Side Spray

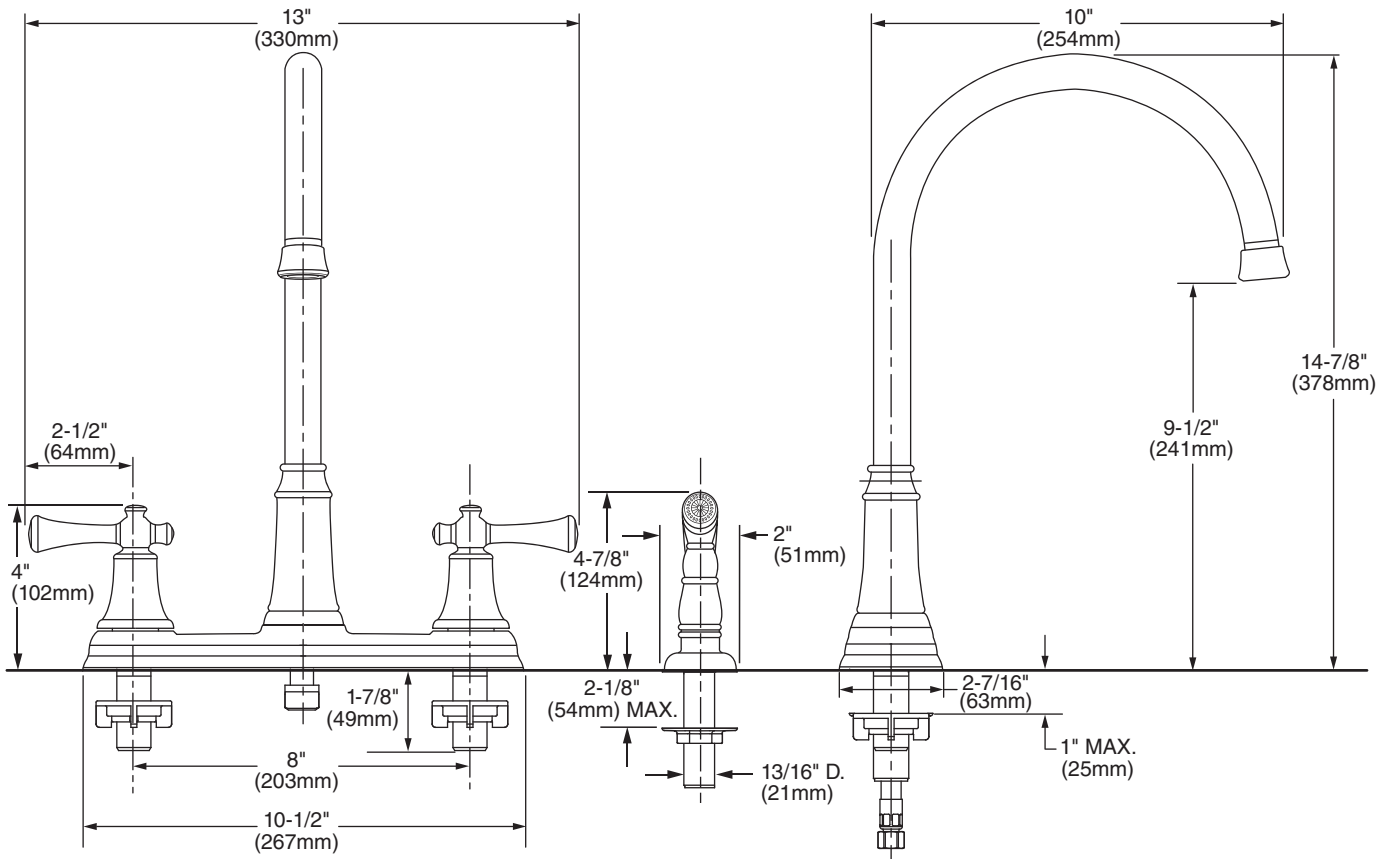

**GENERAL DESCRIPTION:**

Durable brass construction. 1/4 turn washerless ceramic disc valve cartridges. Durable cast brass waterway with 1/2" male inlet shanks. Brass gooseneck swivel spout. Metal escutcheon plate (escutcheon size 10-5/16"L x 2-3/8"W). 2.2 gpm/8.3 L/min. maximum flow rate, 1.5 gpm/5.7 L/min, maximum flow rate for F15 models. Metal lever handles.

**PRODUCT FEATURES:**

**Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

**Lifetime Warranty:** On function and finish.


**SUGGESTED SPECIFICATION:**

Two handle kitchen faucet shall feature a cast brass waterway. Shall also feature 1/4 turn washerless ceramic disc valve cartridges and a brass gooseneck swivel spout. Faucet shall be American Standard Model# 4285.551.\_\_\_\_.\_\_\_\_.


**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ASME A112.18.1
- CSA B 125
- NSF 61/Section 9 & Annex G
- ANSI A117.1

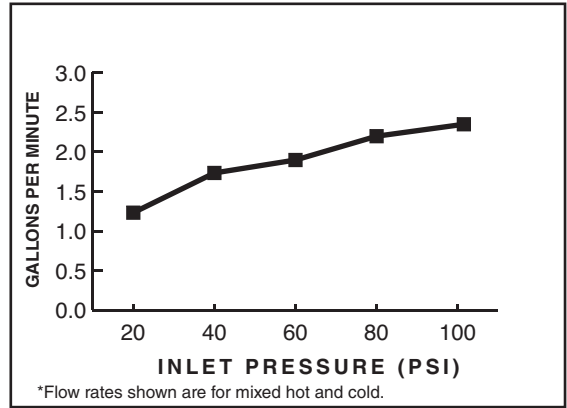


**2.2gpm/8.3L/min. FLOW RATE**

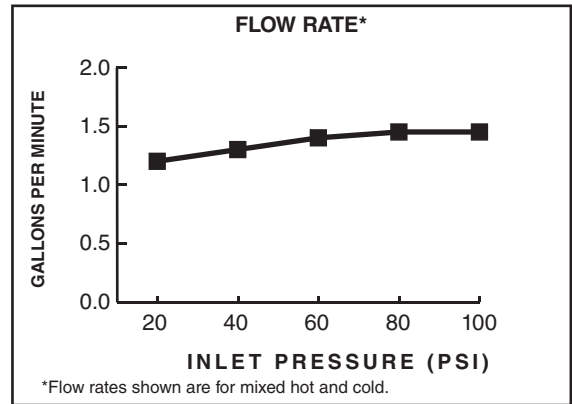

**1.5 gpm/5.7 L/min. FLOW RATE**

Product Number	Description	Finish Options		
		Polished Chrome	Stainless Steel (PVD)	Oil Rubbed Bronze
		002	075	224
4285.551	Two Handle Kitchen Faucet with Side Spray - 2.2 gpm/8.3 L/min. maximum flow rate			
4285.551.F15	Two Handle Kitchen Faucet with Side Spray - 1.5 gpm/5.7 L/min. maximum flow rate			

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.