


FLOWISE® TRADITIONAL WATER SAVING HAND SHOWER

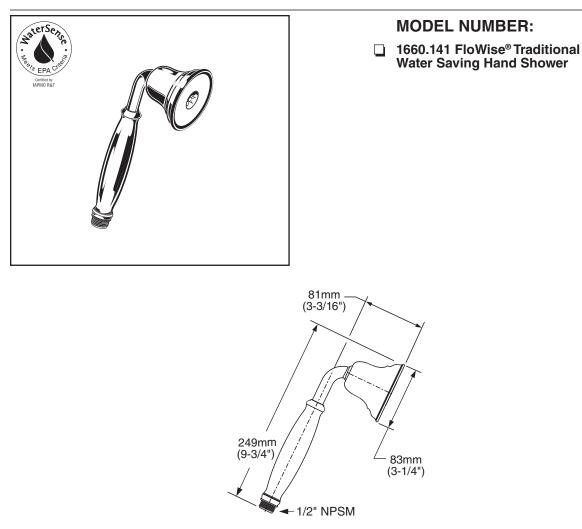

GENERAL DESCRIPTION:

Hand shower uses 40% less water than standard 2.5gpm hand showers. Hand shower rated at 1.5gpm/5.7L/min. maximum flow rate. Hand shower has single spray function using Turbine Technology. Pressure compensating flow control device. Includes check valve.

PRODUCT FEATURES:

Water Saving: Saves 40% in water usage.

Pressure Compensating Flow Control Device: Provides consistent flow over a wide pressure range.

Single Function: Hand Shower provides drenching spray for full coverage of the user.

Easy Clean Spray Nozzles: Easily clean lime and calcium build up. Nozzles will not clog.

SUGGESTED SPECIFICATION

Hand shower shall save 40% in water usage. Hand shower shall always start at 1.5gpm/5.7L/min. Hand shower shall have a pressure compensating control device and shall include a check valve. Fitting shall be American Standard Model # 1660.141.

American Standard


FLOWISE® TRADITIONAL WATER SAVING HAND SHOWER

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA 125.1





		Finish Options		
Product		Polished Chrome	Oil Rubbed Bronze	PVD Satin Nickel
Number	Description	002	224	295
1660.141	FloWise® Traditional Water Saving Hand Shower			

Hand Shower Accessories			Hand Shower Accessories			
Product Number	Description		Product Number	Description		
8888.035	59" Metal Shower Hose		8888.036	Fixed Wall Bracket		
8888.053	79" Metal Shower Hose (Chrome Only)		8888.037	Wall Supply		
1660.400	Vacuum Breaker		8888.068	Round Wall Supply		
1660.410	Shower Arm Diverter		8888.069	Square Wall Supply		
8888.096	Shower Arm Bracket		8888.038	Wall Supply Bracket	\bigcirc	