

GREEN TEA®

PRESSURE BALANCE BATH/SHOWER FITTING

WITH FloWise® SHOWERHEAD



T010.508 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

SHOWERHEAD

FloWise water saving 3-function showerhead offers up to 40% water savings at maximum 2.0 gpm/7.6 L/min. flow rate.

WALL TUB SPOUT

Metal slip-on diverter spout.

WALL VALVE TRIM


Available with metal lever handle. Metal wall estucheon.

MODEL NUMBER:

TRIM KITS:

- T010.508 Green Tea BATH/SHOWER Trim Kit Metal Lever Handle. FloWise Showerhead. LESS Valve Body.
- **T010.507 Green Tea SHOWER ONLY Trim Kit** Metal Lever Handle. FloWise Showerhead. LESS Valve Body.

For use with R120 Series Pressure Balance Valves. See reverse side for available Rough Valves.

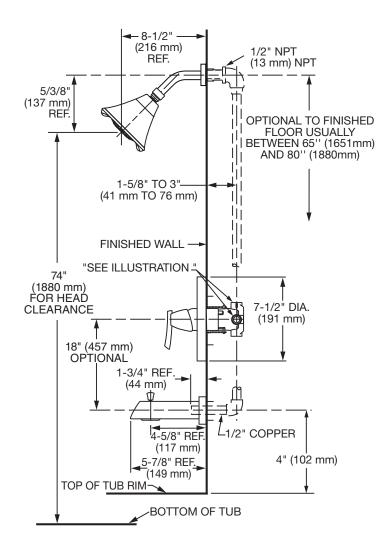

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature water saving 3-function showerhead with Max. 2.0 gpm/7.6 L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T010.50 _. ___ and Valve Body Model # R12 _.



GREEN TEA®


PRESSURE BALANCE BATH/SHOWER FITTING WITH FloWise® SHOWERHEAD

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125.1





		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.	Finish Options
* SLI	Product		Polished Chrome
<u>~</u>	Number	Description	002
	T010.508	Bath/Shower Trim Kit. Metal Lever Handle. FloWise Showerhead. LESS Valve Body.	
·	T010.507	Shower Only Trim Kit. Metal Lever Handle. FloWise Showerhead. LESS Valve Body.	

	Product Number	Description
	R121	Rough Valve Body less trim. Universal inlets/outlets.
ES	R121SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
	R120	Rough Valve Body less trim. Direct Sweat inlets/outlets.
BO	R120SS	Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops.
Œ	R125	Rough Valve Body less trim. Female Thread inlets/outlets.
\LVE	R125SS	Rough Valve Body less trim. Female Thread inlets/outletswith Screwdriver Stops.
\$	R127	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
ко исн	R127SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
<u>o</u>	R128	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
-	R128SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R129	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R129SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

Meets the American Disabilities Act Guidelines and **ANSI A117.1**Requirements for the physically challenged.