FLUENT™ PRESSURE BALANCE BATH/SHOWER FITTING



T186.502 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

SHOWERHEAD

6"-Single function showerhead at maximum 2.5 gpm/9.5 L/min. flow rate.

WALL TUB SPOUT

Metal slip-on diverter spout.

WALL VALVE TRIM


Available with metal lever handle. Metal wall escutcheon.

MODEL NUMBER:

TRIM KITS:

- ☐ T186.502 Fluent BATH/SHOWER Trim Kit Metal lever handle. LESS valve body.
- ☐ T186.501 Fluent SHOWER ONLY Trim Kit Metal lever handle. LESS valve body.
- ☐ T186.500 Fluent VALVE ONLY Trim Kit Metal lever handle. LESS valve body.

For use with R110 Series Pressure Balance Valves. See reverse side for available Rough Valves.

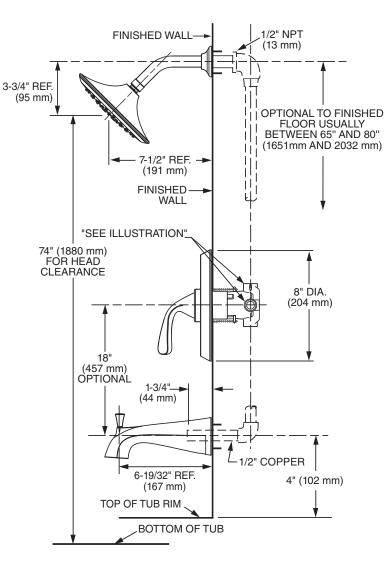

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature 6"-single function showerhead with Max. 2.5 gpm/9.5 L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T186.50_.___ and Valve Body Model # R11_.




FLUENT™ PRESSURE BALANCE BATH/SHOWER FITTING

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125.1



*To modify a product, add suffix after the 4th digit (ex. T064<u>ITP</u>502.002)

			FLO	W RATE	*	=	Spout Shower
GALLONS PER MINUTE	8Г					_	Silowei
	6				_	_	
NS PEF	4-						
GALLC	2-		_	-	-		
	$_{0}$ L	1					.
		20	40	60	80	100	
*F	low rate		NLET n are for m			PSI)	

		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.		Finish Options		
TS *	Product		Polished Chrome	Oil Rubbed Bronze	PVD Satin Nickel	
¥	Number	Description	002	224	295	
M	T186.502	Bath/Shower trim kit. Metal lever handle. LESS valve body.				
Ë	T186.501	Shower Only trim kit. Metal lever handle. LESS valve body.				
	T186.500	Valve trim only . Metal lever handle. LESS valve body.				

	Product	
	Number	Description
	R111	Rough Valve Body less trim. Universal inlets/outlets.
BODIES	R111SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
	R110	Rough Valve Body less trim. Direct sweat inlets/outlets.
	R110SS	Rough Valve Body less trim. Direct sweat inlets/outlets with Screwdriver Stops.
Ē	R115	Rough Valve Body less trim. Female Thread inlets/outlets.
ROUGH VALV	R115SS	Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops.
	R117	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
	R117SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
	R118	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
	R118SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R119	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R119SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

B70