

FLUENT™

PRESSURE BALANCE BATH/SHOWER FITTING WITH FLOWISE® SHOWERHEAD





T186.508 Bath/Shower Trim Shown
*WaterSense® approval pending

GENERAL DESCRIPTION:

SHOWERHEAD

Water saving 3-function FloWise showerhead offers up to 40% water savings at maximum 2.0 gpm/7.6 L/min. flow rate.

WALL TUB SPOUT

Metal slip-on diverter spout.

WALL VALVE TRIM


Available with metal lever handle.
Metal wall escutcheon.

MODEL NUMBER:

TRIM KITS:

- ☐ T186.508 Fluent BATH/SHOWER Trim Kit Lever handle. FloWise showerhead. LESS valve body.
- ☐ T186.507 Fluent SHOWER ONLY Trim Kit
 Lever handle. FloWise showerhead. LESS valve body.

For use with R110 Series Pressure Balance Valves. See reverse side for available Rough Valves.

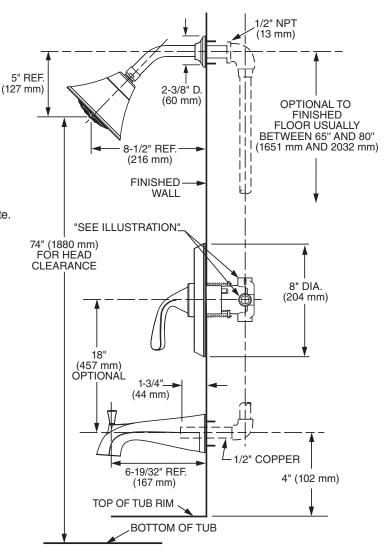

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature water saving 3-function showerhead with Max. 2.0 gpm/7.6 L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T186.50_.___ and Valve Body Model # R11_.



FLUENT'"

PRESSURE BALANCE BATH/SHOWER FITTING WITH FLOWISE® SHOWERHEAD

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125.1



Modifica	Parts Suffix*	
IPS Spout	6-19/32* 1-1/4* (32 mm) (167 mm) REF. DIA. HOLE	IPT
Factory Installed Decal Ring (Red/Blue)		WD

*To modify a product, add suffix after the 4th digit (ex. T064<u>ITP</u>502.002)

GALLONS PER MINUTE	8 6 -		FLO	W RATE	·*	*	Spout Shower
	2 0		40 NLET			100 (PSI)	
Г	ow rai	es snow	n are for in	lixed flot a	na cola.		

		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.		Finish Options		
* SI	Product		Polished Chrome	Oil Rubbed Bronze	PVD Satin Nickel	
¥	Number	Description	002	224	295	
RIM	T186.508	Bath/Shower trim kit. Lever handle. FloWise showerhead. LESS valve body.				
F	T186.507	Shower Only trim kit. Lever handle. FloWise showerhead. LESS valve body.				

	Product Number	Description
	R111	Rough Valve Body less trim. Universal inlets/outlets.
ES	R111SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
▤	R110	Rough Valve Body less trim. Direct sweat inlets/outlets.
BO	R110SS	Rough Valve Body less trim. Direct sweat inlets/outlets with Screwdriver Stops.
Ш	R115	Rough Valve Body less trim. Female Thread inlets/outlets.
VALVE	R115SS	Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops.
\$	R117	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
ROUGH	R117SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
Į Ž	R118	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
ш	R118SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R119	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R119SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

Meets the American Disabilities Act Guidelines and **ANSI A117.1**Requirements for the physically challenged.